



CNX SERIES HYDRAULIC TORQUE TOOL



HexForce CNX is built to exceed the expectations of professionals seeking unmatched speed, durability, reliability, and user-friendliness in their bolting tasks. Constructed with high-strength aluminium. The HexForce CNX boasts exceptional strength and resilience. We prioritise operator comfort and ease of use with an ergonomic design that minimises fatigue and strain, while intuitive controls ensure smooth operation and error-free tightening.

The HexForce CNX series offers a versatile range of torque capacities and square drive sizes, effortlessly adapting to your specific needs.

High Strength Aerospace Aluminium Material

Ensures exceptional durability and lightweight handling.

One-Way Ratcheting Mechanism

Provides efficient fastening and accuracy.

Ratchet Freeing Mechanism


Allows for smooth and precise bolt loosening.

Multi-Axis 360°-180° Swivel

Offers unmatched versatility and access in confined spaces.

TORQUE RANGE 200-52500 FT.LBS.
271-71180 NM

TORQUE TOOLS

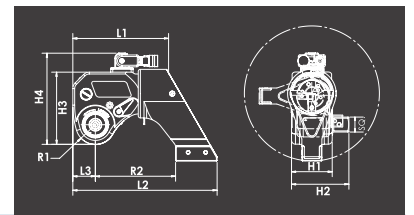

MODEL	L1 (inch/ mm)	L2 (inch/ mm)	L3 (inch/ mm)	H1 (inch/ mm)	H2 (inch/ mm)	H3 (inch/ mm)	H4 (inch/ mm)	R1 (inch/ mm)	R2 (inch/ mm)	DRIVE SIZE	WEIGHT (lbs/ kg)	TORQUE (ft.lbs./Nm)	
												MIN.	MAX.
CNX-02	4.9	7.3	1.1	2.0	2.9	3.7	4.9	1.0	4.1	3/4"	4.41	200	1339
	124	186.5	28.8	51.6	72.6	93.3	124.4	25	104.3		2	271	1816
CNX-04	6.4	9.7	1.5	2.7	3.7	4.8	6.4	1.3	5.3	1"	10.36	479	3228
	161.9	245.5	39.1	68.8	94.4	121.2	162.1	33.3	135.2		4.7	650	4377
CNX-07	7.7	11.7	1.9	3.3	5.0	5.7	7.3	1.6	6.4	1 1/2"	18.08	834	5587
	195.8	296.1	48.5	82.6	126.9	143.7	185.1	39.9	161.6		8.2	1131	7575
CNX-11	7.7	12.6	2.2	3.6"	5.1	6.5	8.5	1.7	6.9	1 1/2"	24.91	1200	8000
	195.6	319.3	55.2	90.7	129.3	165.1	215.9	44.7	176.8		11.3	1627	10846
CNX-15	9.6	14.4	2.3	4.1	5.7	7.2	9.1	2.0	8.0	1 1/2"	33.07	1754	11513
	243	366.2	57.2	103.3	145.7	183.2	231.4	49.8	203.5		15	2378	15610
CNX-20	10.54	15.5	2.5	4.4	7.1	8.1	10.2	2.2	8.8	2 1/2"	44.53	2012	14082
	267.8	392.9	63.3	113	180.6	206	258.7	55.5	223.8		20.2	2728	19093
CNX-30	11.4	17.3	2.7	4.7	7.1	8.8	10.2	2.4	9.6	2 1/2"	43.43	2958	19748
	289.8	438.7	68.8	120.1	180.3	223	260.1	59.9	243.3		19.7	4011	26775
CNX-35	11.8	18.5	3.1	5.2	7.5	9.6	11.5	2.6	10.2	2 1/2"	68.56	3883	25890
	299.7	470.4	78.4	133.3	190	243.8	292.1	66.0	260.3		31.1	5265	35102
CNX-50	14.0	21.2	3.3	5.8	8.3	10.8	12.4	2.9	11.7	2 1/2"	77.60	5397	37078
	356.3	539.2	84.6	147.8	211.3	274.1	313.9	73.7	298.2		35.2	7317	50271
CNX-72	15.5	23	3.7	6.6	9.4	11.0	12.8	3.3	12.8	2 1/2"	124.34	7875	52500
	393.7	584	94	166.9	237.7	279.4	325.1	82.6	325.6		56.4	10677	71180

*Minimum and maximum torque output data may vary.



ADVANCED BOLTING SOLUTIONS PVT. LTD.

HO: "ABS House", Plot No. W-116 (A),
T.T.C. Industrial Area, MIDC Khairane,
Navi Mumbai - 400 710.

Phone: +91 3526 4444
E-mail: marketing@absgroup.in
Web: www.absgroup.in